



TR60M SERIES 60W SWITCHING ADAPTER



Features

- * Universal Input Range 90-264VAC
- * Meets EN60601-1 and EN55011 Class B
- * Continuous Short Circuit Protection
- * Over Voltage Protection
- * Efficiency & Standby Power Meet Level V
(Output Cable Length \leq 1800mm)
(TR60M12 : Output Cable Length \leq 720mm 16AWG)
(TR60M15 : Output Cable Length \leq 1220mm 16AWG)
(TR60M18, TR60M19 : Output Cable Length \leq 1500mm 18AWG)
- * CEC Level IV Compliant
(Output Cable Length \leq 1800mm)
(TR60M Series meets CEC IV except
TR60M05 is Non-CEC Compliant)
(TR60M12: Output Cable Length \leq 1220mm 16AWG)



Ordering information

TR60MXX- XX X XX
 Model No. DC Plug Type OVP DC Cable Length and Type
 E: With OVP
 01: 720mm
 02: 1220mm
 03: 1800mm
 11: 720mm with Ferrite Core
 12: 1220mm with Ferrite Core
 13: 1800mm with Ferrite Core
 *18AWG/UL1185

MODEL	OUTPUT VOLTAGE	MIN. LOAD	OUTPUT CURRENT	RIPPLE & NOISE	VOLTAGE SETPOINT	LINE REGULATION	LOAD REGULATION	%EFF.. (Typ.)
TR60M05	5V	0A	6A	50mVp-p	$\pm 4\%$	$\pm 1\%$	$\pm 6\%$	71%
TR60M12	12V	0A	5A	120mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 5\%$	83%
TR60M15	15V	0A	4A	150mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 3\%$	84%
TR60M18	18V	0A	3.33A	180mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	84%
TR60M19	19V	0A	3.15A	190mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	85%
TR60M24	24V	0A	2.5A	240mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	85%
TR60M36	36V	0A	1.66A	360mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	86%
TR60M48	48V	0A	1.25A	480mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	87%

Specifications are subject to change without notice.

Specifications

INPUT SPECIFICATIONS:

Voltage 90~264Vac
 Frequency 47 to 63Hz
 Inrush Current 80A max. @240Vac
 Conducted EMI CISPR/FCC Class B
 Leakage Current 0.1mA max.

OUTPUT SPECIFICATIONS:

Holdup Time 8ms typ. @115Vac
 Short Circuit Protection Continuous
 Over Voltage Protection Yes
 Temperature Coefficient $\pm 0.05\%/^{\circ}\text{C}$

GENERAL SPECIFICATIONS:

Isolation Input to output =5,656VDC
 Operating Temperature 0 ~ 60°C (see derating curve)
 Storage Temperature -20 ~ 85°C
 Humidity 93% RH max. Non condensing
 Cooling Natural Convection
 Switching Frequency 100KHz Typical
 MTBF MIL-HDBK-217F, GB, at 25°C/115VAC 200K hrs min.
 Altitude 3000m
 Dimensions 5.197x2.283x1.201inches (132.00x58.00x30.50mm)
 Weight 345g(0.76 Pounds)


SAFETY AND EMC:

Emission and Immunity EN55011, EN60601-1-2, EN61000-3-2
 EN61000-3-3
 Safety IEC60601-1, EN60601-1, UL60601-1

Mechanical Specification


All Dimensions are in inches(mm)
 Tolerance: Inches:X.XXX \pm 0.02
 Millimeters:X.XX \pm 0.5

TR60M Series Derating Curve

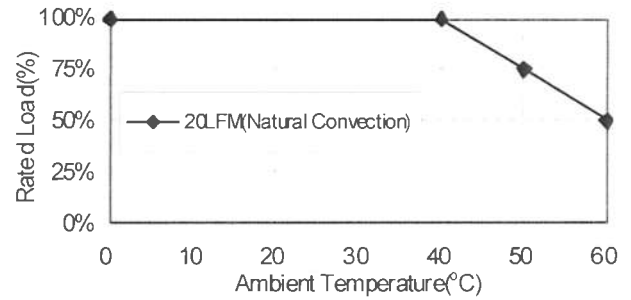

NOTE:

1. Voltage setpoint at 60% full load
2. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for Ripple & Noise measuring @20MHz BW.
3. Line regulation measured from 100Vac to 240Vac, full load.
4. Load regulation measured from 60% to 100% full load and from 60% to 20% load (60% +/- 40% full load)
5. "Various TR Series adapters are PSE certified. PSE certification alone is not sufficient for importation into Japan. A valid PSE mark must contain the name of the importer as shown in the example below. If PSE mark is required, the name of the registered importer must be supplied to Cincon on order placement. Product labels will not contain PSE mark if importer name is not supplied. Consult factory or local representative for details"

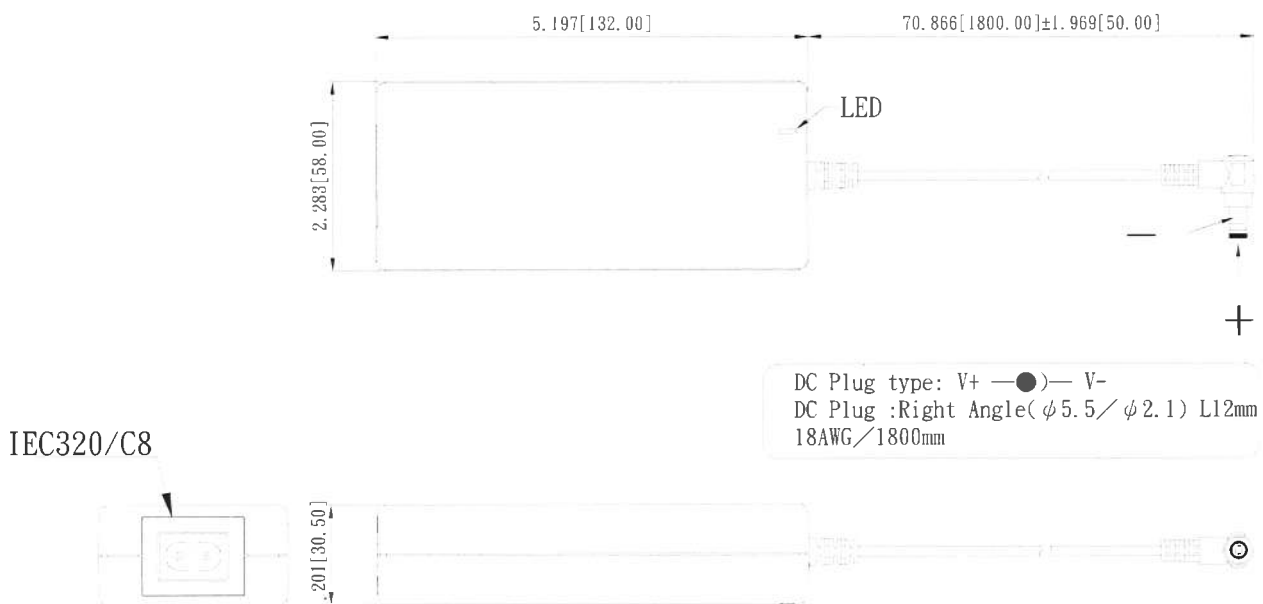

Typical at 25°C, nominal line and 75% load, unless otherwise Specified