


# Quick Selection Map

## Note

At the moment of power on, the LED power supply will work in C.V. mode and can provide a peak output current; after the LED turns on, the LED power supply will go into C.C. mode (patent pending).

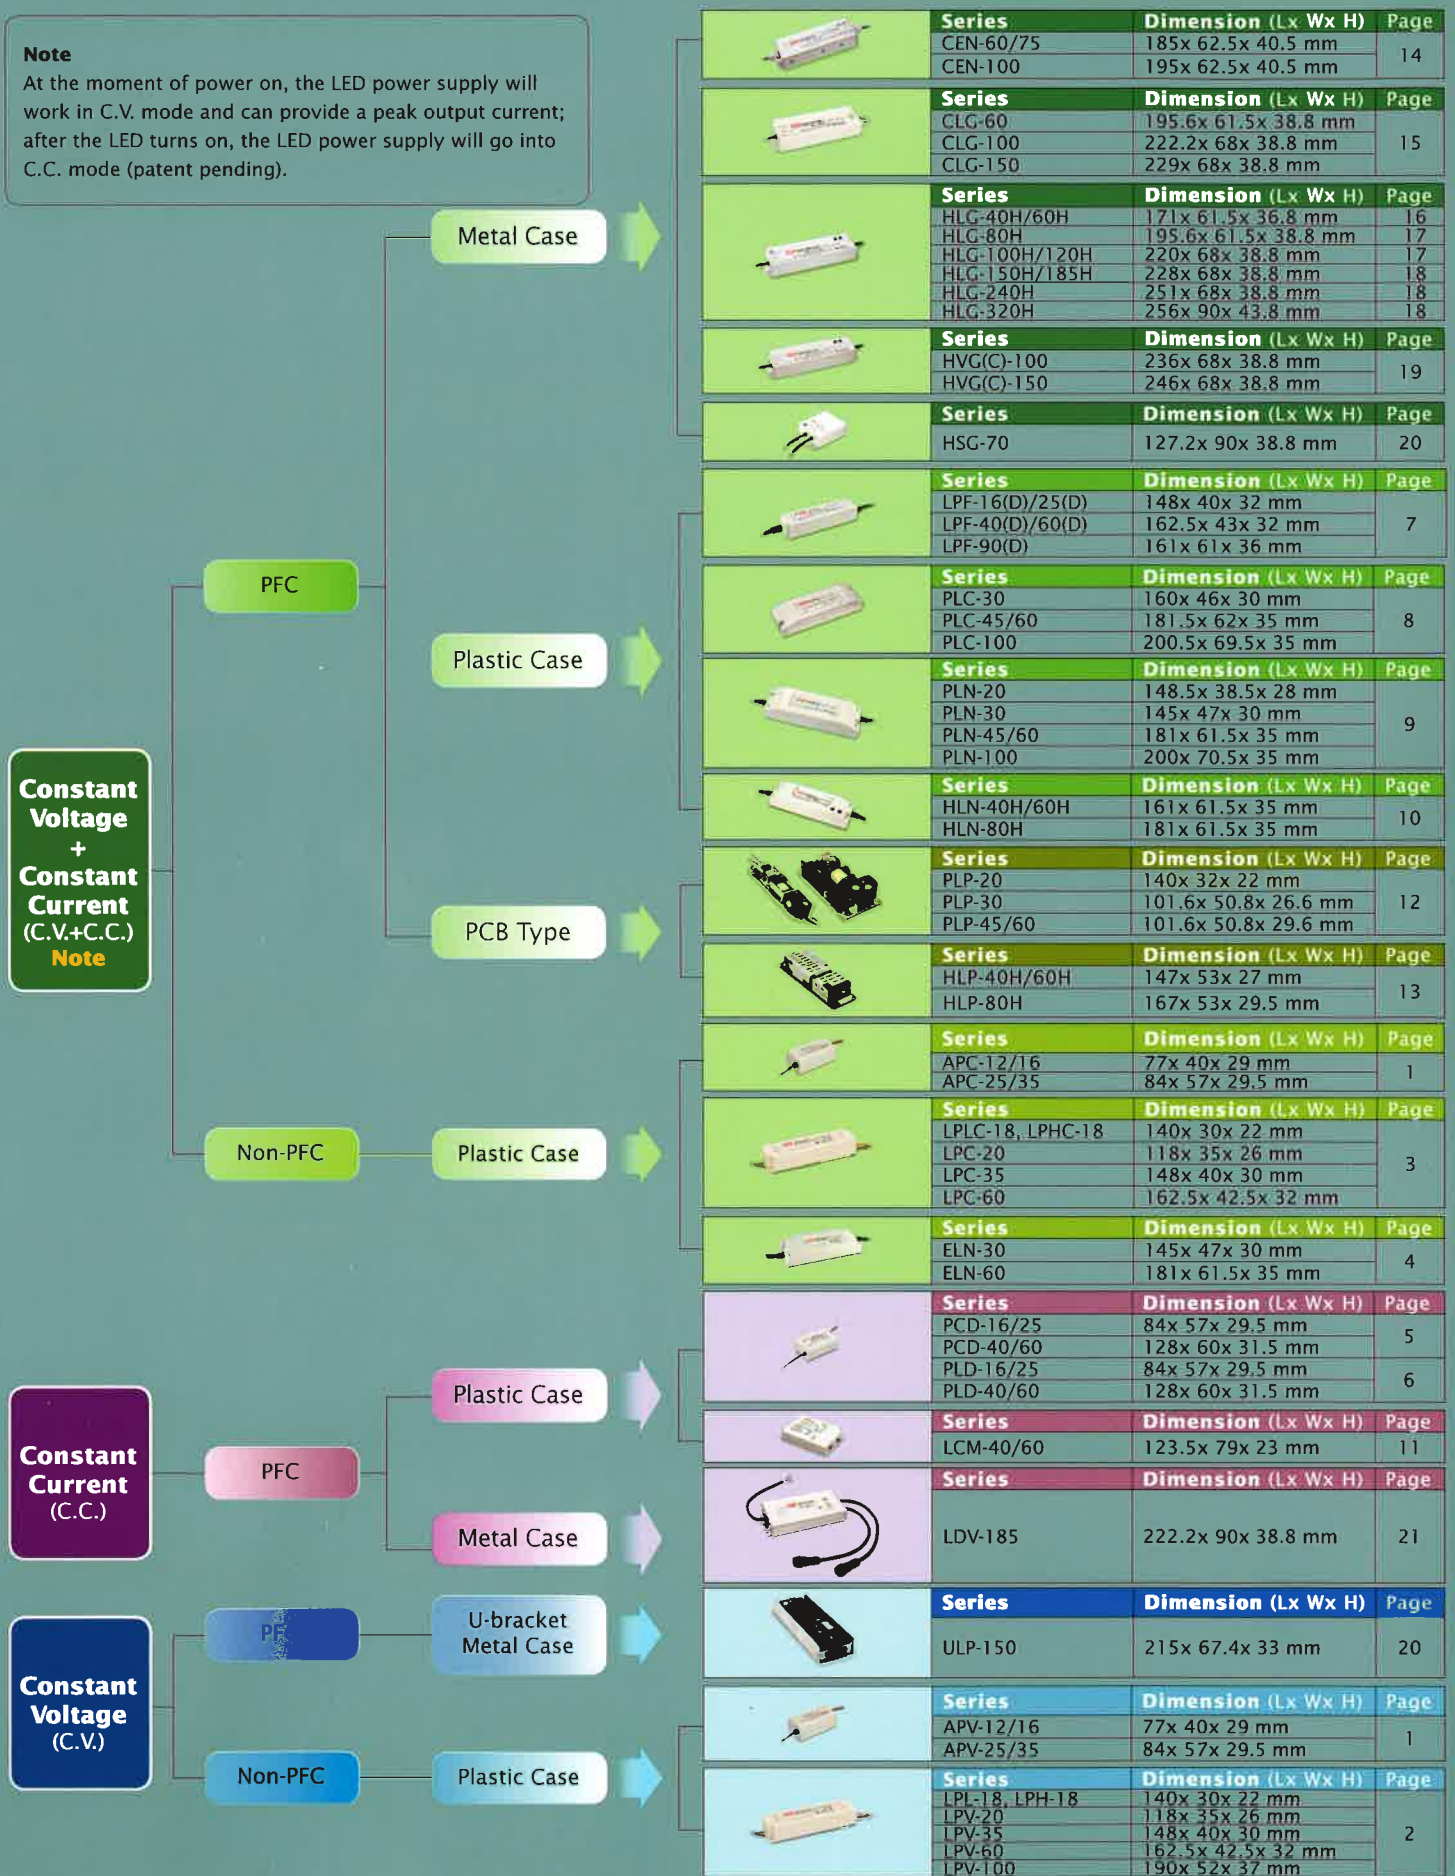

**Constant Voltage + Constant Current (C.V.+C.C.)**  
Note

**Constant Current (C.C.)**

**Constant Voltage (C.V.)**

PFC

Non-PFC

Metal Case

Plastic Case

PCB Type

Plastic Case

Metal Case

U-bracket Metal Case

Non-PFC

Plastic Case

Series	Dimension (Lx Wx H)	Page
CEN-60/75	185x 62.5x 40.5 mm	14
CEN-100	195x 62.5x 40.5 mm	
CLG-60	195.6x 61.5x 38.8 mm	15
CLG-100	222.2x 68x 38.8 mm	
CLG-150	229x 68x 38.8 mm	
HLG-40H/60H	171x 61.5x 36.8 mm	16
HLG-80H	195.6x 61.5x 38.8 mm	17
HLG-100H/120H	220x 68x 38.8 mm	17
HLG-150H/185H	228x 68x 38.8 mm	18
HLG-240H	251x 68x 38.8 mm	18
HLG-320H	256x 90x 43.8 mm	18
HVG(C)-100	236x 68x 38.8 mm	19
HVG(C)-150	246x 68x 38.8 mm	
HSG-70	127.2x 90x 38.8 mm	20
LPF-16(D)/25(D)	148x 40x 32 mm	7
LPF-40(D)/60(D)	162.5x 43x 32 mm	
LPF-90(D)	161x 61x 36 mm	
PLC-30	160x 46x 30 mm	8
PLC-45/60	181.5x 62x 35 mm	
PLC-100	200.5x 69.5x 35 mm	
PLN-20	148.5x 38.5x 28 mm	9
PLN-30	145x 47x 30 mm	
PLN-45/60	181x 61.5x 35 mm	
PLN-100	200x 70.5x 35 mm	
HLN-40H/60H	161x 61.5x 35 mm	10
HLN-80H	181x 61.5x 35 mm	
PLP-20	140x 32x 22 mm	12
PLP-30	101.6x 50.8x 26.6 mm	
PLP-45/60	101.6x 50.8x 29.6 mm	
HLP-40H/60H	147x 53x 27 mm	13
HLP-80H	167x 53x 29.5 mm	
APC-12/16	77x 40x 29 mm	1
APC-25/35	84x 57x 29.5 mm	
LPLC-18, LPHC-18	140x 30x 22 mm	3
LPC-20	118x 35x 26 mm	
LPC-35	148x 40x 30 mm	
LPC-60	162.5x 42.5x 32 mm	
ELN-30	145x 47x 30 mm	4
ELN-60	181x 61.5x 35 mm	
PCD-16/25	84x 57x 29.5 mm	5
PCD-40/60	128x 60x 31.5 mm	6
PLD-16/25	84x 57x 29.5 mm	
PLD-40/60	128x 60x 31.5 mm	
LCM-40/60	123.5x 79x 23 mm	11
LDV-185	222.2x 90x 38.8 mm	21
ULP-150	215x 67.4x 33 mm	20
APV-12/16	77x 40x 29 mm	1
APV-25/35	84x 57x 29.5 mm	
LPL-18, LPH-18	140x 30x 22 mm	2
LPV-20	118x 35x 26 mm	
LPV-35	148x 40x 30 mm	
LPV-60	162.5x 42.5x 32 mm	
LPV-100	190x 52x 37 mm	